
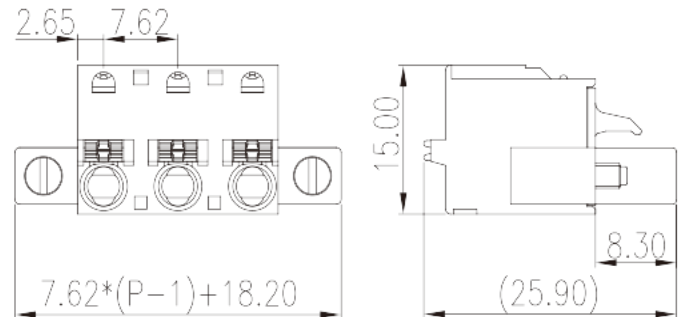


# 3ESDSRM-XXP

PCB Terminal Blocks &gt; PCB Connector-Plug

Date:2026-03-23Version:1.1

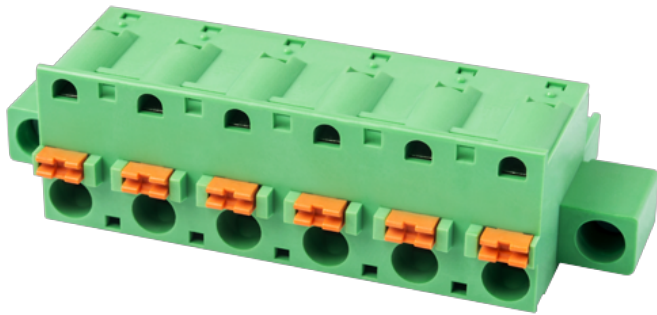

The web catalog is for reference only. Dinkle remains the right of product modification and engineering change of the design.  
The final product is made according to engineering drawing.

## Product Description

Pitch : 7.62 mm, 300V, 10A

## General information

|                     |                                      |
|---------------------|--------------------------------------|
| Short description   | PCB Connector – Plug, Push-in Design |
| Category            | PCB Connector Plug                   |
| Pitch (mm)          | 7.62                                 |
| Color               | Green (default)                      |
| Connection method   | Push in Design                       |
| Type of locking     | With screw flange                    |
| Length (mm)         | $7.62*(P-1)+18.20$                   |
| Width (mm)          | 25.9                                 |
| Height (mm)         | 15                                   |
| Number of positions | 02P~12P                              |
| Level               | Single level                         |

## Material information

|                                              |    |
|----------------------------------------------|----|
| Insulation material                          | PA |
| Insulation material group                    | I  |
| Flame retardant rating , compliant with UL94 | V0 |

|                              |                   |
|------------------------------|-------------------|
| Insulation resistance        | □500MΩ at DC 500V |
| Conductor material           | COPPER ALLOY      |
| Plating of conductor surface | Tin PLATED        |

## Connection data-IEC

|                                                                                                         |         |
|---------------------------------------------------------------------------------------------------------|---------|
| Rated voltage (V)                                                                                       | 1000    |
| Rated current (A)                                                                                       | 15      |
| Rated voltage (II/2)(V)                                                                                 | 1000    |
| Rated voltage (III/2) (V)                                                                               | 630     |
| Rated voltage (III/3)(V)                                                                                | 500     |
| Rated impulse voltage (II/2)(KV)                                                                        | 6       |
| Rated impulse voltage (III/2)(KV)                                                                       | 6       |
| Rated impulse voltage (III/3)(KV)                                                                       | 6       |
| Conductor cross section solid. min (mm <sup>2</sup> )                                                   | 0.2     |
| Conductor cross section solid.max (mm <sup>2</sup> )                                                    | 2.5     |
| Conductor cross section stranded. min (mm <sup>2</sup> )                                                | 0.2     |
| Conductor cross section stranded. max (mm <sup>2</sup> )                                                | 2.5     |
| Conductor cross section flexible, with min ferrule without plastic sleeve (mm <sup>2</sup> )            | 0.25    |
| Conductor cross section flexible, with max ferrule without plastic sleeve (mm <sup>2</sup> )            | 1.5     |
| Conductor cross section flexible, with min ferrule with plastic sleeve (mm <sup>2</sup> )               | 0.25    |
| Conductor cross section flexible, with max ferrule with plastic sleeve (mm <sup>2</sup> )               | 1.5     |
| 2 conductors with same cross section flexible, min twin ferrules with plastic sleeve (mm <sup>2</sup> ) | 0.5     |
| 2 conductors with same cross section flexible, max twin ferrules with plastic sleeve (mm <sup>2</sup> ) | 1       |
| Philips screwdriver size                                                                                | 0.6x3.5 |
| Stripping Length (mm)                                                                                   | 10~11   |

## Connection data-UL

|                                                 |     |
|-------------------------------------------------|-----|
| Rated voltage (UL/CUL Group B)(V)               | 300 |
| Rated current (UL/CUL Group B)(A)               | 10  |
| Rated voltage (UL/CUL Group D)(V)               | 300 |
| Rated current (UL/CUL Group D)(A)               | 10  |
| Min. solid wire connection (AWG) acc. to UL/CUL | 26  |

|                                                  |    |
|--------------------------------------------------|----|
| Max. solid wire connection AWG acc. to UL/CUL    | 12 |
| Min. stranded wire connection AWG acc. to UL/CUL | 26 |
| Max. stranded wire connection AWG acc. to UL/CUL | 12 |

## Environment & Safety

|                                 |     |
|---------------------------------|-----|
| Finger protection (YES or NO)   | YES |
| Operating temperature. max (°C) | 120 |
| Operating temperature. min (°C) | -40 |

## UL Recognized

|                            |       |
|----------------------------|-------|
| Wire Range (Group B)(AWG)  | 26~12 |
| Rated voltage (Group B)(V) | 300   |
| Rated current (Group B)(A) | 10    |
| Wire Range (Group D)(AWG)  | 26~12 |
| Rated voltage (Group D)(V) | 300   |
| Rated current (Group D)(A) | 10    |

## CUL Recognized


|                            |       |
|----------------------------|-------|
| Wire Range (Group B)(AWG)  | 26~12 |
| Rated voltage (Group B)(V) | 300   |
| Rated current (Group B)(A) | 10    |
| Wire Range (Group D)(AWG)  | 26~12 |
| Rated voltage (Group D)(V) | 300   |
| Rated current (Group D)(A) | 10    |

## VDE Approval

|                               |         |
|-------------------------------|---------|
| Wire Range (mm <sup>2</sup> ) | 0.2~2.5 |
| Rated voltage (V)             | 800     |
| Rated current (A)             | 15      |

## Drawings

|  |  |
|--|--|
|  |  |
|--|--|

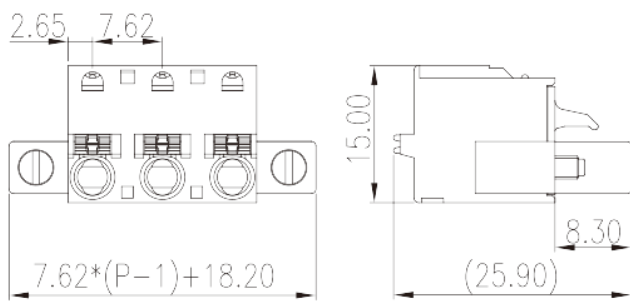

## Approvals

